

INDUSTRIAL BRUSH STRIP - 180° Holder

- Available in six section sizes with over 40 trim lengths or manufactured to customer specification.
- Standard lengths: 2.0 metre, 2.5 metre and 3.0 metres. Cut lengths are available on request.


Standard Materials

Filaments - Extruded from type 6 nylon • Hard wearing • Good memory • Working temperature range: - 40°C to +100°C.

Metal Backing - Electro Galvanised Steel.

Core Wire - Electro Galvanised Steel.

Fixing Carrier - Mill Finish Extruded Aluminium in 180°, 90° and 45° flanges - Anodised or painted finishes available to order.

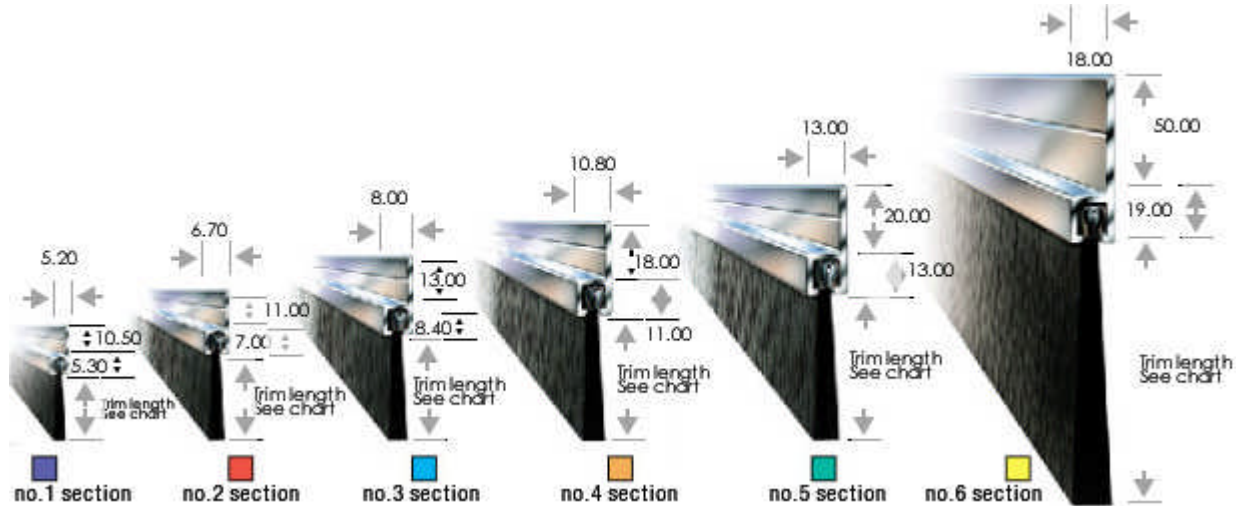

No. 1 Section		No. 2 Section		No. 3 Section		No. 4 Section		No. 5 Section		No. 6 Section	
Trim	Ref	Trim	Ref	Trim	Ref	Trim	Ref	Trim	Ref	Trim	Ref
8mm	FS 1/8-180°	15mm	FS 2/15-180°	17mm	FS 3/17-180°	26mm	FS 4/26-180°	46mm	FS 5/46-180°	210mm	FS 6/210-180°
10mm	FS 1/10-180°	20mm	FS 2/20-180°	20mm	FS 3/20-180°	43mm	FS 4/43-180°	50mm	FS 5/50-180°	250mm	FS 6/250-180°
12mm	FS 1/12-180°	26mm	FS 2/26-180°	26mm	FS 3/26-180°	50mm	FS 4/50-180°	66mm	FS 5/66-180°	300mm	FS 6/300-180°
15mm	FS 1/15-180°	34mm	FS 2/34-180°	34mm	FS 3/34-180°	80mm	FS 4/80-180°	80mm	FS 5/80-180°	-	-
-	-	50mm	FS 2/50-180°	40mm	FS 3/40-180°	102mm	FS 4/102-180°	102mm	FS 5/102-180°	-	-
-	-	-	-	44mm	FS 3/44-180°	-	-	125mm	FS 5/125-180°	-	-
-	-	-	-	50mm	FS 3/50-180°	-	-	150mm	FS 5/150-180°	-	-
-	-	-	-	75mm	FS 3/75-180°	-	-	180mm	FS 5/180-180°	-	-
-	-	-	-	100mm	FS 3/100-180°	-	-	-	-	-	-

- The trim size quoted is mm of Brush Strip out of the aluminium fixing carriers
- All specifications are subject to change at any time without prior notification