

INDUSTRIAL BRUSH STRIP - 45° Holder

- Available in six section sizes with over 40 trim lengths or manufactured to customer specification.
- Standard lengths: 2.0 metre, 2.5 metre and 3.0 metres. Cut lengths are available on request.


Standard Materials

Filaments - Extruded from type 6 nylon • Hard wearing • Good memory • Working temperature range: - 40°c to +100°c.

Metal Backing - Electro Galvanised Steel.

Core Wire - Electro Galvanised Steel.

Fixing Carrier - Mill Finish Extruded Aluminium in 180°, 90° and 45° flanges - Anodised or painted finishes available to order.

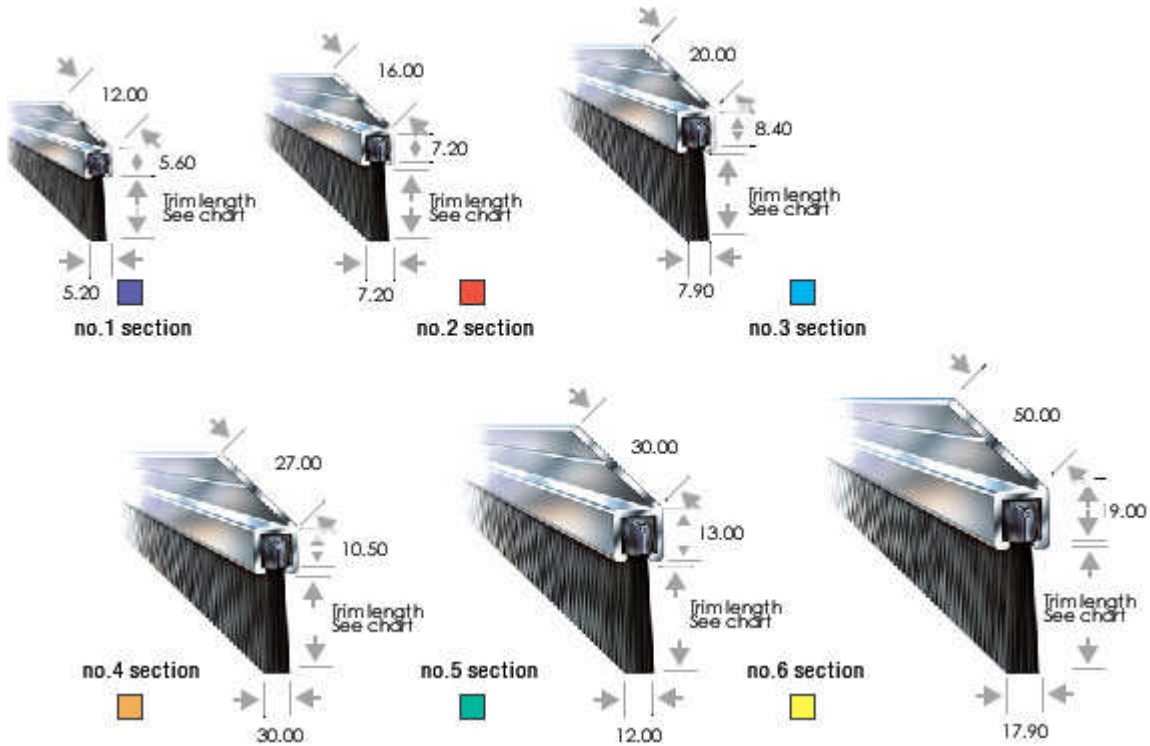

No. 1 Section		No. 2 Section		No. 3 Section		No. 4 Section		No. 5 Section		No. 6 Section	
Trim	Ref	Trim	Ref	Trim	Ref	Trim	Ref	Trim	Ref	Trim	Ref
8mm	FS 1/8-45°	15mm	FS 2/15-45°	17mm	FS 3/17-45°	26mm	FS 4/26-45°	46mm	FS 5/46-45°	210mm	CS6 6/210-45°
10mm	FS 1/10-45°	20mm	FS 2/20-45°	20mm	FS 3/20-45°	43mm	FS 4/43-45°	50mm	FS 5/50-45°	250mm	FS 6/250-45°
12mm	FS 1/12-45°	26mm	FS 2/26-45°	26mm	FS 3/26-45°	50mm	FS 4/50-45°	66mm	FS 5/66-45°	300mm	FS 6/300-45°
15mm	FS 1/15-45°	34mm	FS 2/34-45°	34mm	FS 3/34-45°	80mm	FS 4/80-45°	80mm	FS 5/80-45°	-	-
-	-	50mm	FS 2/50-45°	40mm	FS 3/40-45°	102mm	FS 4/102-45°	102mm	FS 5/102-45°	-	-
-	-	-	-	44mm	FS 3/44-45°	-	-	125mm	FS 5/125-45°	-	-
-	-	-	-	50mm	FS 3/50-45°	-	-	150mm	FS 5/150-45°	-	-
-	-	-	-	75mm	FS 3/75-45°	-	-	180mm	FS 5/180-45°	-	-
-	-	-	-	100mm	FS 3/100-45°	-	-	-	-	-	-

- The trim size quoted is mm of Brush Strip out of the aluminium fixing carriers
- All specifications are subject to change at any time without prior notification