



WESSEX INTUMESCENT SUPPLIES LTD

Unit 22, Regent Trade Park, Barwell Lane, Gosport, Hants. PO13 0EQ

Fire, Draught, Weather & Acoustic Seals
Conservatory Roof Glazing Systems

Tel: 01329 221111 Fax: 01329 221122

Email: sales@wis-ltd.com

Website: www.wis-ltd.com


ALUMINIUM TRICKLE VENTILATORS

Easy to install surface mounted aluminium slot trickle vents for use on doors or windows suitable for timber, pvc or aluminium frames.

Vents are supplied with wire mesh fly screen, c/w visible open/closed ventilation control which is available in two sizes 200mm long (2210mm² free area) or 375mm long (4371mm² free area), the vents could be cut to suit a particular frame size where required, you could also powder coat them to match/blend in with surroundings.

Colours: White with PVC/Plastic end fixings ~ Brown with PVC/Plastic end fixings

Supplied to special order only and subject to MOQ 50 vents (can be mixed colour/size) supplied in full pack quantity only 5 vents per size/colour, no split/part packs available.

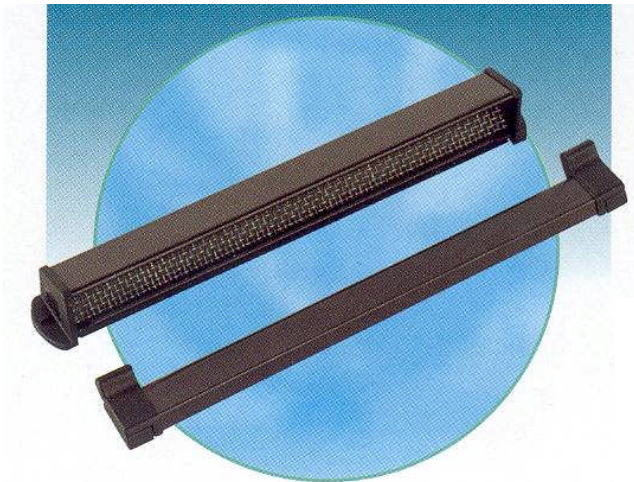

Product Dimensions [approx.]

Length	Width [external]	Depth [external]	Width [internal]	Depth [internal]
200mm	28mm	28mm	22mm	8mm
375mm	28mm	28mm	22mm	8mm

Length = overall measurement across face of window/door frame

Width = on face of window/door frame [excl. flipper]

Depth = projecting from the face of the window/door frame [excl. flipper]