



WESSEX INTUMESCENT SUPPLIES LTD

Unit 22, Regent Trade Park, Barwell Lane, Gosport, Hants. PO13 0EQ

Fire, Draught, Weather & Acoustic Seals
Conservatory Roof Glazing Systems

Tel: 01329 221111 Fax: 01329 221122

Email: sales@wis-ltd.com

Website: www.wis-ltd.com

Dry Glazing Gasket

A quick, simple and efficient method of dry glazing without the use of adhesives/sealants, the gasket is simply anchored into a groove in the bead.

Manufactured from EPDM the gasket is UV stable, ozone resistant and is compatible with polycarbonate and soft coated glasses.



Fits into a groove 3mm wide x 4mm deep @ 5mm centre



Size: 12mm (15mm compressed) x 7.5mm

Available in 50m or 200m coils

Colour: Black

Typical applications:

Include window glazing (single, double or triple), roof capping seal

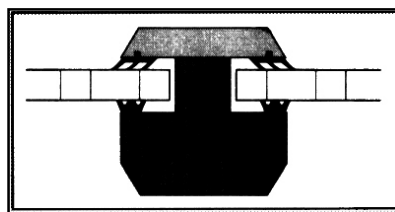

Minimum recommended compression 25%, normal glazing technique and applications used in fitting

All dimensions are nominal and subject to manufacturing tolerances

The above information to the best of our knowledge is true and accurate and is supplied for your guidance only. Customers should satisfy themselves as to the suitability of the product in its intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. Wessex Intumescent Supplies Ltd., disclaim any liability for loss, damage or any other expense arising from the use of the information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice. TRADEMARKS ACKNOWLEDGED
Ref: 53DGG/01/2010